


# MINGO COUNTY LANDFILL

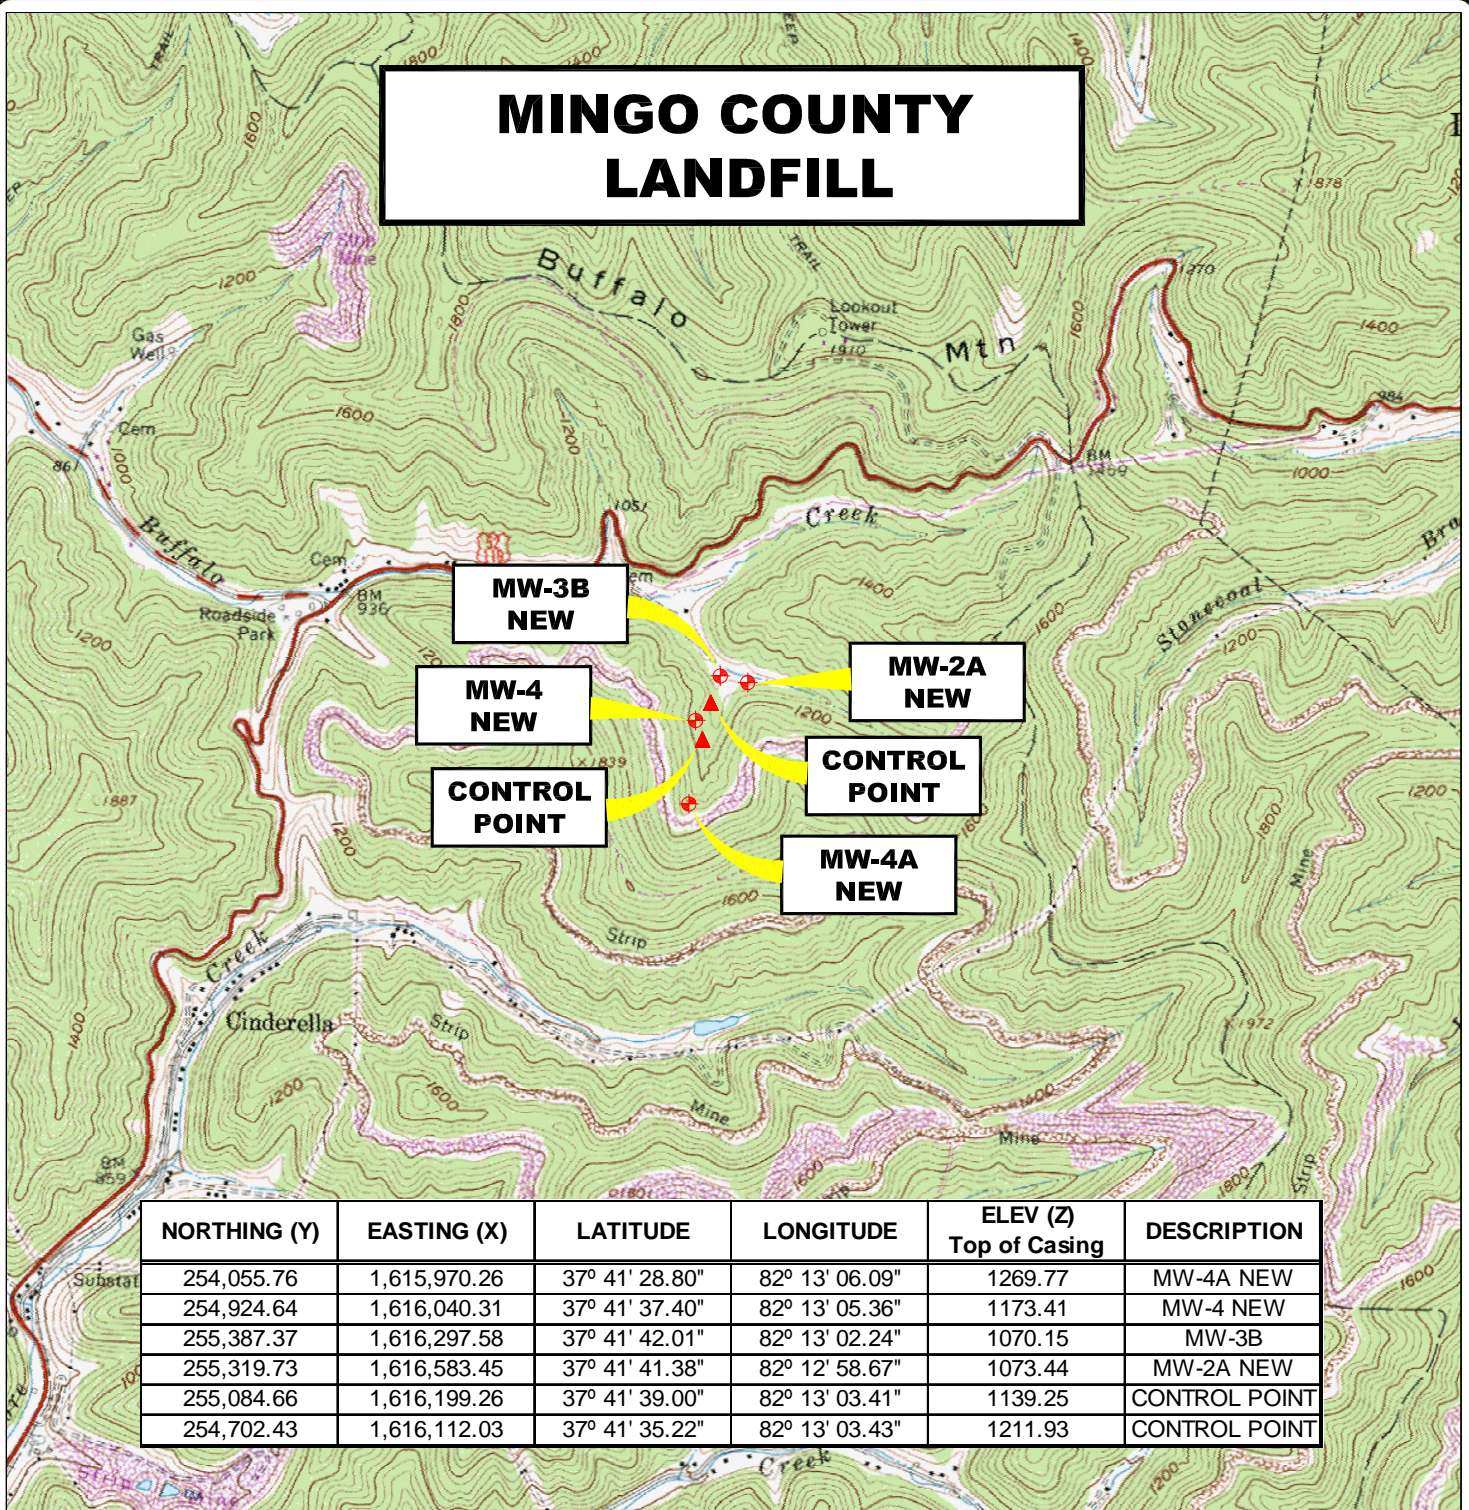

NORTHING (Y)	EASTING (X)	LATITUDE	LONGITUDE	ELEV (Z) Top of Casing	DESCRIPTION
254,055.76	1,615,970.26	37° 41' 28.80"	82° 13' 06.09"	1269.77	MW-4A NEW
254,924.64	1,616,040.31	37° 41' 37.40"	82° 13' 05.36"	1173.41	MW-4 NEW
255,387.37	1,616,297.58	37° 41' 42.01"	82° 13' 02.24"	1070.15	MW-3B
255,319.73	1,616,583.45	37° 41' 41.38"	82° 12' 58.67"	1073.44	MW-2A NEW
255,084.66	1,616,199.26	37° 41' 39.00"	82° 13' 03.41"	1139.25	CONTROL POINT
254,702.43	1,616,112.03	37° 41' 35.22"	82° 13' 03.43"	1211.93	CONTROL POINT

## LOCATION MAP

DELBARTON 7.5' U.S.G.S. QUADRANGLE

0' 2,000' 4,000' 6,000'



SCALE: 1 INCH = 2,000 FEET



**Stantec**

### Stantec Consulting Services Inc.

1 Moore Avenue  
Buckhannon WV 26201  
Tel. 304.472.7140  
Fax. 304.472.6239  
www.stantec.com

PROJECT NO. 173611045  
SURVEYED BY: WAG  
DRAWN BY: JHL  
CHECKED BY: DEM  
APPROVED BY: JHL  
DATE: SEPTEMBER 28, 2009

NOTE:  
HORIZONTAL DATUM :  
WEST VIRGINIA STATE PLANE COORDINATES  
NAD 83 SOUTH ZONE (CORS 96).

VERTICAL DATUM : NAVD 88 GEOID 03 (CONUS)

COORDINATE UNITS : US SURVEY FOOT  
DISTANCE UNITS : US SURVEY FOOT  
HEIGHT UNITS : US SURVEY FOOT

SHT. NO.  
1  
TOTAL  
2