

REPORT OF SEISMIC RESEARCH

By:

**WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
OFFICE OF EXPLOSIVES AND BLASTING**

DECEMBER 31, 2004

TABLE OF CONTENTS

Abstract.....	Page 1
Terms	Page 3
Introduction.....	Page 5
Ground Vibration Review	Page 7
Air Overpressure Research	Page 7
Surface Explosions.....	Page 9
Valleys	Page 12
Rolling Terrain.....	Page 13
Steep Terrain.....	Page 15
All Terrain	Page 16
Attenuation Drop Rates	Page 17
USBM versus OEB Regression Equations	Page 17
Cube Root.....	Page 17
Conclusions.....	Page 18
Future Research.....	Page 18
Bibliography	Page 20

ABSTRACT

The Office of Explosives and Blasting (OEB) analyzed ground vibration seismic recordings as a continuation of the 2003 legislative research paper. Site seismic data from 275 blasts over a 2-year period was graphed and compared against various ground vibration predictive models. Graphs and a statistical study show that ground vibration predictive equations can be effective as part of site-specific blast plans if performed properly.

In order to accurately predict airblast from surface coal mine blasting, research was conducted to gather data from various permits to evaluate and identify factors that affect airblast. OEB conducted a statistical analysis with these data sets to identify common factors and establish an accurate prediction model that could be used in blast design. These models can be used to predict and limit levels of airblast at structures to maintain compliance with regulatory standards and allowable blasting limits.

TERMS

Airblast – See Overpressure.

Amplitude – Measured in inches, it is the maximum positive or negative value of one period in a cyclic changing quantity.

Attenuation – Rate at which a seismic wave decays over distance.

Compliance - Standards from West Virginia Code of State Regulation Title 199 (199CSR1).

Ground Vibration – The operator shall not exceed the maximum weight of explosives (lbs.) to be detonated in any eight millisecond period calculated using the following scaled distance formulas, without seismic monitoring:

SCALED DISTANCE FORMULA	DISTANCE FROM THE BLASTING SITE TO THE NEAREST STRUCTURE (FEET)
$W = (D / 50)^2$	0 – 300
$W = (D / 55)^2$	301 – 5,000
$W = (D / 65)^2$	5,001 or greater

W = Weight of explosives in pounds

D = Distance to the nearest structure

The scaled distance formulas need not be used for any particular blast if a seismograph measurement at the nearest protected structure is recorded and maintained for the blast. The peak particle velocity in inches per second shall not exceed the following values at any protected structure:

SEISMOGRAPH MEASUREMENT (IPS)	DISTANCE FROM THE BLASTING SITE TO THE NEAREST STRUCTURE (FEET)
1.25	0 – 300
1.00	301 – 5,000
0.75	5,001 or greater

Airblast – Airblast shall not exceed the maximum limits below at the location of any dwelling, public buildings, school, church, or community or institutional building outside the permit area.

LOWER FREQUENCY LIMIT OF MEASURING SYSTEM (Hz) (^{+/-} 3 dB)	MAXIMUM LEVEL (dB)
0.1 Hz or lower	134 peak or (.0139 psi)
2 Hz or lower	133 peak or (.0131 psi)
6 Hz or lower	129 peak or (.0081 psi)
C weighted	105 peak or (.0005 psi)

Concussion – The inaudible part of an air blast.

Contour – Special blasting method used where special care is taken to avoid overbreak and downslope placement of blasted material.

A-Scale – The scale of a sound measurement instrument in which an in-built filter discriminates against low frequencies.

C-Scale – The scale of a sound measurement instrument that only slightly filters low frequencies.

Decibels (dB) – A unit of sound pressure. It must be noted that overpressure dB's are different than community noise dB's. Noise measurements are made with sound level meters with filters that alter the true pressure readings. Seismographs and pressure gages are designed to record true airblast overpressures. Seismographs will record directly as dB or pounds per square inch (psi). The conversion of dB to psi is accomplished with the formula: $\text{psi} = \log^{-1} ((\text{dB} - 170.75/20))$.

Far-Field – The distance from a point of interest in relation to a geometric quantity. For OEB purposes, far-field is anything over 500' from the blast.

Frequency – Number of cycles per unit of time, usually seconds, also called hertz (Hz).

Inversion – An atmospheric condition where the air temperature increases with altitude.

Mountain Top – See Production.

Near-Field – The distance from a point of interest in relation to a geometric quantity. For OEB purposes, near-field is anything under 500' from the blast.

Overpressure – The pressure exceeding the atmospheric pressure generated by rock movement or sound waves from blasting.

Parting – Rock mass located between two seams of coal.

Production – Blast method used where the primary activity is to remove material down to coal seam.

Scaled Distance – Factor obtained by dividing the distance (in feet) from the blast to the point of observation by a square root of the explosive mass (in pounds) per delay.

Scaled Distance Formula – See Compliance.

Supersonic Speed – Speed greater than the speed of sound (1,086 feet per second at 32 degrees and sea level).¹

INTRODUCTION

OEB, in compliance with West Virginia Code §22-3A-10, conducts research to develop scientific data on blasting concerns and effects of the West Virginia natural terrain on blast vibrations, both ground and air. The 2003 legislative research paper entitled “Report of Seismic Research” focuses on ground vibrations and the potential for predicting ground seismic waves using regression analysis. Per the 2003 report, the ground vibration predictive model format is:

$$PPV = k * (D / W^{.5})^A$$

where:

PPV = Predicted Peak Particle Velocity in inches per second (ips)

k = Blast site constant or y-intercept on PPV vs. Scaled Distance Regression Curve

D = Distance from the blast to seismograph in feet

W = Maximum pounds per delay of explosives

A = Slope of regression curve.

Therefore, to predict a ground vibration below 1.0 ips for a structure 310 feet from a blast, you should not exceed the variable of 166 pounds per delay.

During the course of the research project in late 2003, seismograph arrays placed ahead of mining revealed that the original ground vibration prediction equation would not always be in compliance with West Virginia blasting laws and regulations if blast designs stayed constant. This is true for structure #82 and #97. (See Figure 1 on page 4) In order to increase the safety factor in the predictive model, OEB approved a new site constant (k) of 240 submitted by the permittee.


The permittee collected ground vibration recordings over a two-year period that OEB analyzed as a continuation of the 2003 report. OEB sorted the data and performed regression analysis on various structures to determine the validity of ground vibration predictive equations as part of the site-specific blast plan. The average PPV for all structures studied was 0.47 ips for the original blast design. OEB calculated an average PPV of 0.16 ips when the permittee used the predictive equation as the basis of their blast design. At this particular site, ground predictive equations used as a compliance method were successful.

OEB used seismic recordings obtained during 2004 in air overpressure prediction calculations. This research considers topography such as valleys, and flat, rolling, and steep terrains.

Airblast measurements were recorded on unconfined surface detonations on flat terrain as baseline worst-case mining scenarios. These predictions were then compared against the United States Bureau of Mines (USBM) regression results from Report of Investigation (RI) 8892. Although some air overpressure data sets are small, trends do appear. Data sets reveal that valleys generate the highest airblast potential, followed by steep and then rolling terrain. Other environmental parameters such as wind speed and direction, temperature inversions, confinement, etc., were not included in the present study. Future research must consider these variables to accurately predict airblast in the West Virginia coalfields.

¹ Agne. Rustan, et al., Rock Blasting Terms and Symbols, (Rotterdam, Netherlands: A.A. Balkema, 1998). pp. 7 - 156

Ground Vibration Research
2003-2004

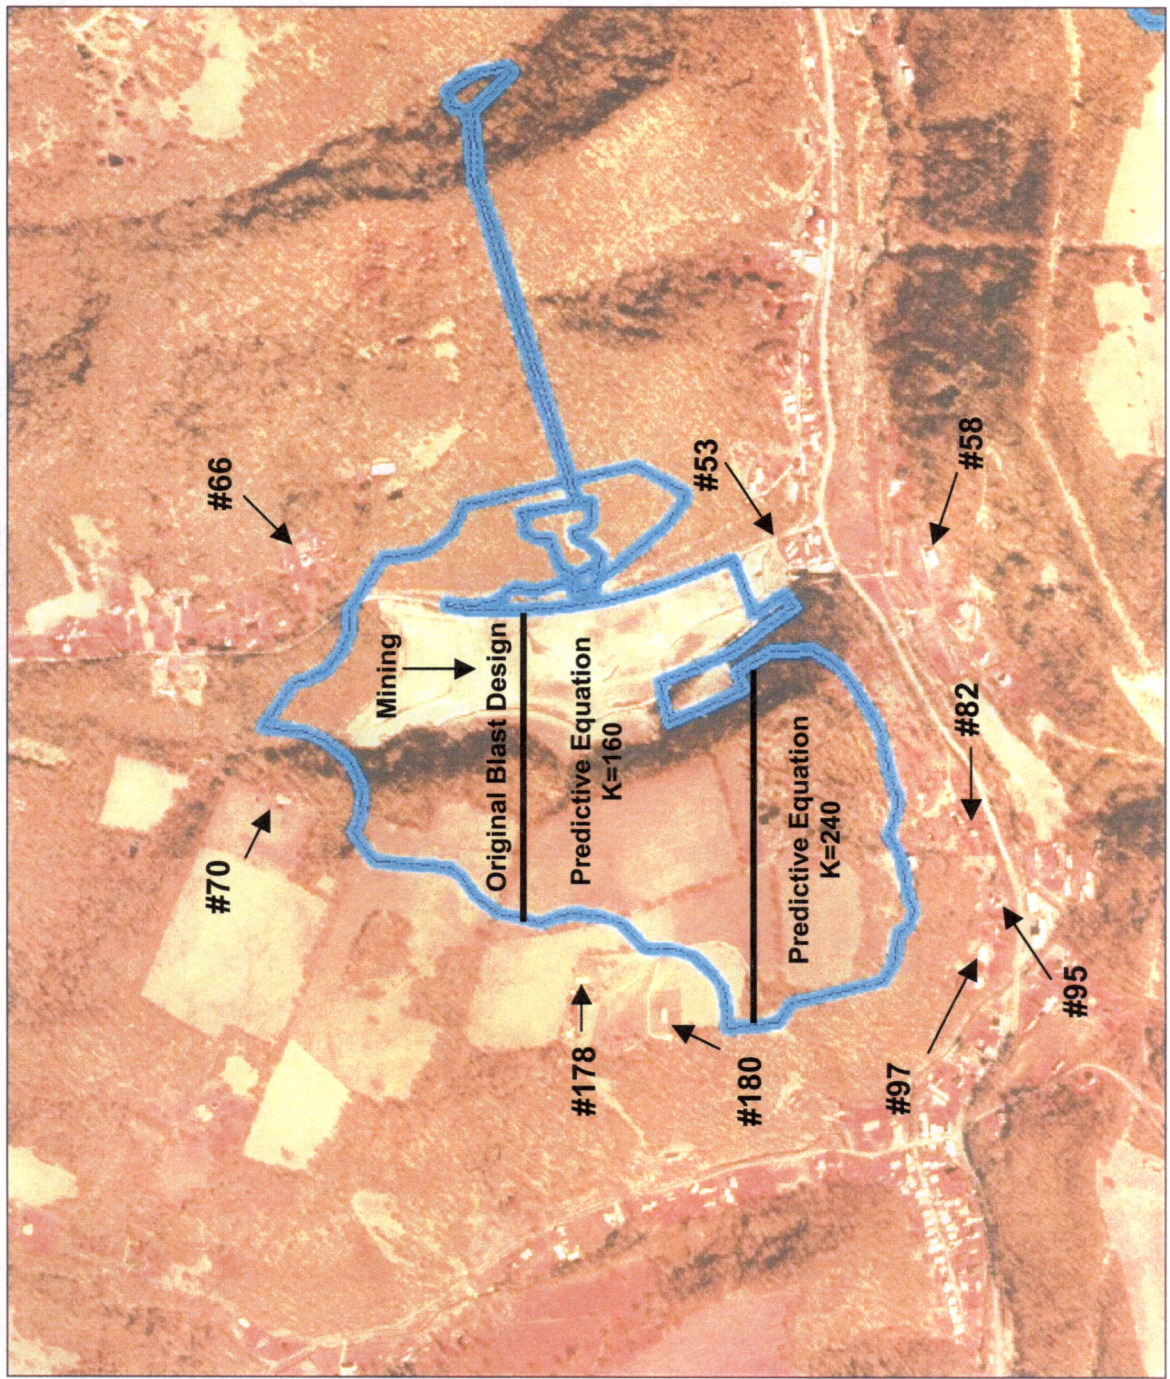

Legend
Permit Boundary




Figure 1

GROUND VIBRATION REVIEW

OEB analyzed seismic records from 275 blasts from August 26, 2002 thru September 27, 2004. Figure 1 is the plan view of the permitted area divided into blast design zones. These zones include the original blast design, predictive equation $k = 160$, and predictive equation $k = 240$. Also noted are the locations of the structures where seismograms were recorded. Mining started at the northern end of the permit and progressed south. The seismic data is as follows:

DATES	NUMBER OF RECORDS	AVERAGE PPV	AVERAGE DISTANCE
(Pre-Prediction) 8/26/02 – 5/30/03	141	0.48 ips	591 feet
(Post-Prediction) 8/4/03 – 9/27/04	134	0.16 ips	694 feet

Information above shows a significant decrease in PPV when using the regression predictive method instead of the original blast design and all structures are considered.

OEB studied seismograph readings at particular structures to determine the benefits of using predictive equations as part of a site-specific blast plan.

DATES	BLAST DESIGN	STRUCTURE	NUMBER OF RECORDS	AVERAGE PPV	AVERAGE DISTANCE
9/18/02 – 1/17/03	Original	66	26	0.50 ips	413 feet
8/27/02 – 2/27/03	Original	70	90	0.43 ips	613 feet
8/26/02 – 5/30/03	Original	178	23	0.63 ips	698 feet
8/4/03 – 9/27/04	k=160	178	26	0.21 ips	534 feet
1/27/04 – 1/30/04	k=160	180	15	0.13 ips	847 feet
3/10/04 – 3/30/04	k=240	180	12	0.15 ips	788 feet
11/3/03 – 1/16/04	k=160	53	24	0.09 ips	687 feet
8/2/04 – 9/27/04	k=240	97	13	0.12 ips	581 feet
1/23/04 – 9/27/04	k=240	95	17	0.14 ips	864 feet
3/3/04 – 9/8/04	k=240	82	17	0.14 ips	714 feet
3/1/04 – 3/8/04	k=240	58	9	0.18 ips	686 feet

The findings above show by using a predictive equation for blast design, a decrease in PPV occurs. Decrease in PPV may be attributed to a 40% reduction in the maximum charge weight per delay when using the predictive models.

Figure 2 on page 6 is a graph showing the regression curve where $k = 160$ and displays the results of seismic data in comparison to the predictive curve. Sixty-eight seismic records were plotted with six having higher PPV's than predicted. Therefore, 91% of the PPV predictions fell below the regression curve, but all records were in compliance.

Field Data vs. Original Prediction Line
8/4/2003 to 1/30/2004

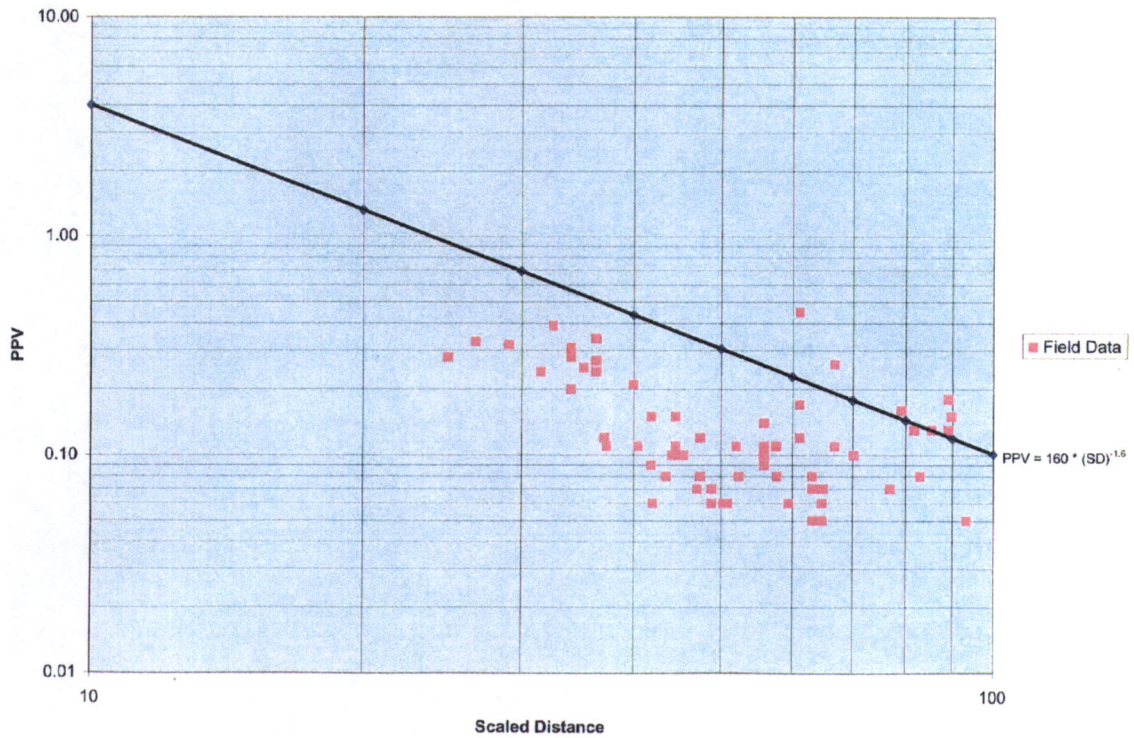


Figure 2

Figure 3 shows the regression curve where $k = 240$. Sixty-nine seismic records were plotted with two having higher PPV's than predicted. The results show 97% of the predictions fell below the regression curve and are compliant. Of the 3% above the regression curve, only one record was non-compliant.

Field Data vs. Modified Prediction Line
3/1/2004 to 9/27/2004

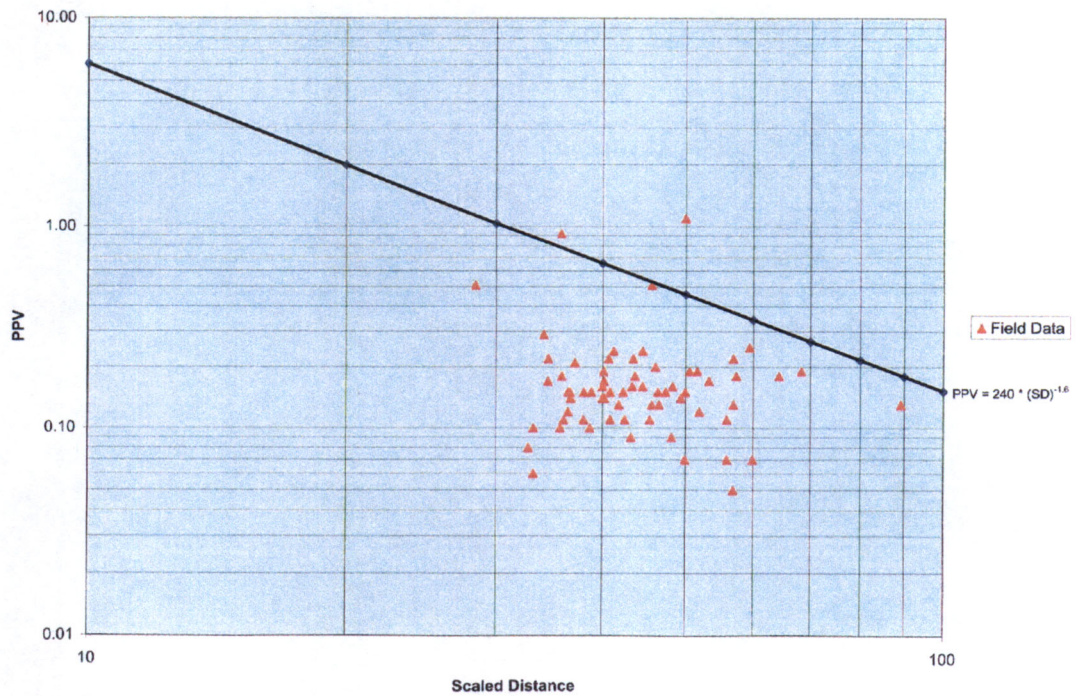


Figure 3

Data that did not fall below the regression curve may have been attributed to no seismic array data, geophone coupling, and variations in detonator firing times.

AIR OVERPRESSURE RESEARCH

OEB continues air overpressure research. This is partly due to air prediction models encountered in submitted blast plans, but also the potential for future surface detonation data.

Seismic arrays placed in strategic positions recorded air overpressure levels. OEB processed collected data using regression analysis to generate a predictive equation. This equation is created on a log-log graph with the x-axis being the cube root scaled distance, and the y-axis representing psi of air overpressure. Cube root scaled distance is $D/W^{.333}$. D is the distance between the blast and seismograph, and W is the maximum charge weight per delay. Figure 11 on page 11 illustrates this concept. The "goodness of fit" (R^2) describes the processed data quality and for prediction model integrity is 0.70 or greater.

Airborne energy called airblast is created during the detonation of a coal mine blast. The compressed airwaves travel through the air such as they would through water or ground. Airwaves are audible if they fall within a 20 – 20,000 Hz range. Although frequency less than 20 Hz is inaudible, it creates secondary audible sounds in the form of rattling windows or doors.

Variables that affect the intensity of air overpressure are charge weight per delay, spatial relationships, detonator delay intervals, confinement, highwall orientation, wind speed and direction, air temperature, topography, depth of charge burial, exposed surface detonating cords, and volume of displaced rock. These factors make it more difficult to predict airblast than ground vibrations (PPV).

The four causes of air overpressure are:

- 1) Rock Pressure Pulse (RPP)
- 2) Air Pressure Pulse (APP)
- 3) Gas Release Pulse (GRP)
- 4) Stemming Release Pulse (SRP)

Vertical ground displacement from the seismic wave, which generates small air pulses, creates RPP. This component of airblast has the smallest amplitude and highest frequency. Amplitude, approximated at 1/650 of the vertical PPV, arrives at the seismograph at the same time as ground vibration. Figure 4 on page 8 shows this phenomenon. The acoustic waveline shows the microphone has recorded the RPP as it arrives simultaneously with the transverse, vertical, and longitudinal ground vibrations.

In a proper blast design, APP is the dominant pulse in the total air overpressure pulse and is created from movement of the rock face in a forward or upward motion. Figure 4's acoustic waveline shows the APP spike after the RPP has been recorded. Every hole initiated in a blast is a source of APP and timing between holes can usually be detected when seismographs are used near-field. Dispersion and refraction of the individual pulses and the ability to determine blast timing becomes more difficult as far-field distances are approached.

VIBRATIONS ANALYSIS REPORT

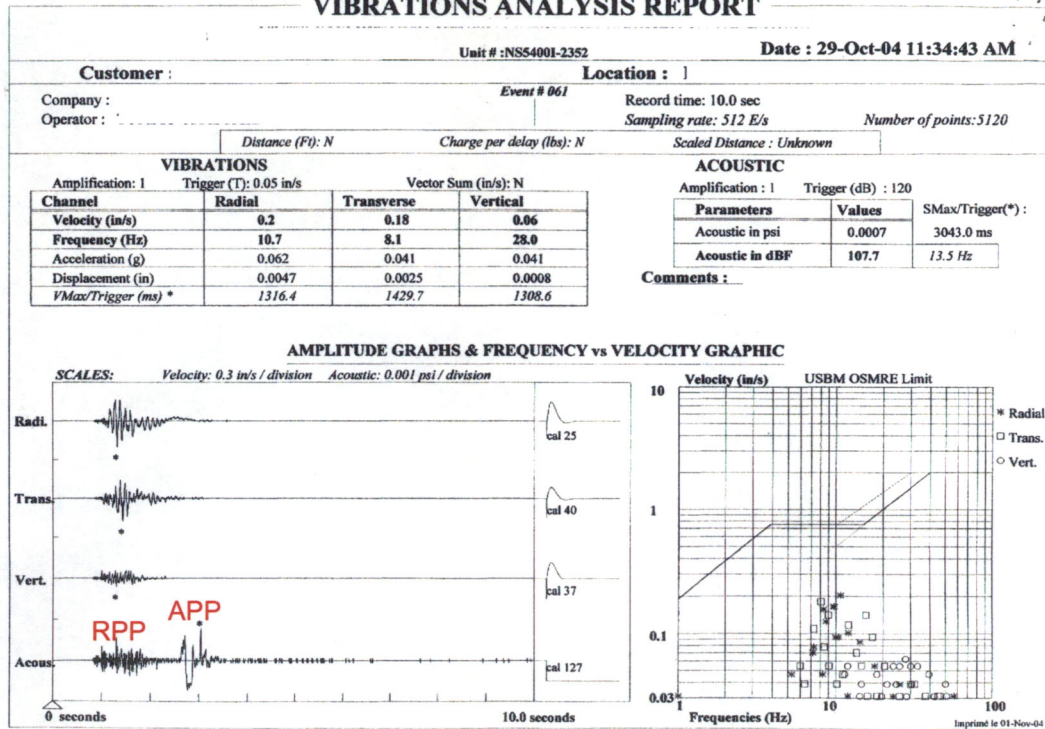


Figure 4

GRP and SRP are the most detrimental and controllable aspects of airblast. The GRP results from expanding gases escaping through weak geologic zones such as mud seams, natural cracks, or joint systems; or through cracks developed during the blast. Proper communications between blaster and driller minimizes GRP. The driller should note the depths and thicknesses of any geologic anomalies encountered while drilling and communicate this information to the blaster. The blaster should take face burden measurements and view the face before hole loading begins. Stemming ejection causes SRP. Proper stemming material of sufficient thickness and good burden-to-hole depth ratio will minimize SRP. The ratio should be less than one.

Airblast is categorized according to frequency. A Type I airblast is 5 – 25 Hz and Type II is less than 5 Hz. Type I is more serious in terms of potential damage as structures natural frequency response is 5 - 25 Hz frequency range.

Although frequency is an important parameter in airblast phenomena, this report will focus more on decibel prediction results for West Virginia surface coal mines. Existing regulatory blasting compliance using scaled distance does not require measurement of airblast.

Although existing USBM research shows that ground vibration and air overpressure frequency have a relationship to a building's natural frequency and damage level, this report will focus on decibel prediction results for West Virginia surface coal mines. Current Surface Coal Mining and Reclamation Act (SMCRA) and West Virginia Code of State Regulation Title 199 (199CSR1) seismic monitoring standards do not include frequency as part of structure damage criteria.

SURFACE EXPLOSIONS

OEB participated with the Federal Bureau of Investigation (FBI) on training exercises to obtain data on surface detonations and placed two seismic arrays to record the surface explosions. It was surmised the airblast generated by a surface detonation would be worse than that generated by a contour, production, or parting shot.



Figure 5



Figure 6

Figures 5 and 6 show the truck and car bombs involved with this training exercise.



Figure 7



Figure 8

Figure 7 is the fireball produced from the car detonation. Figure 8 is the crater produced from the truck detonation and Figure 9 is the crater and debris field from the car detonation.



Figure 9

Figure 10 shows the locations of the seismographs for this exercise.

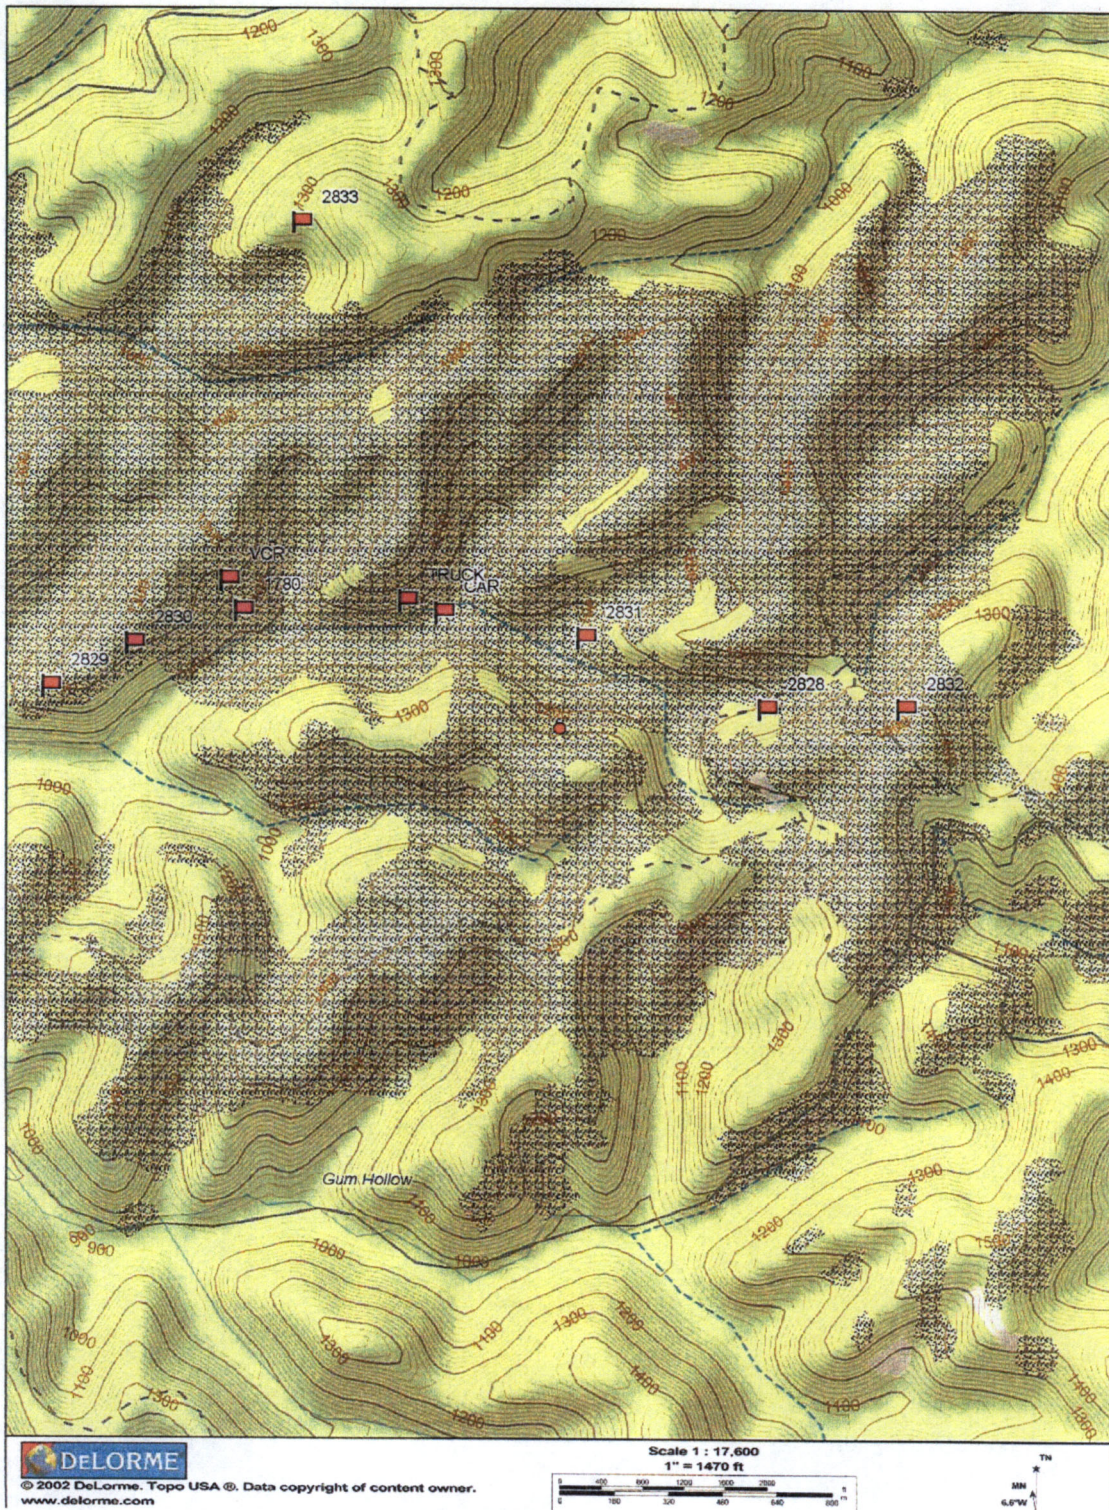


Figure 10