

west virginia department of environmental protection

Office of Oil and Gas 601 57th Street, S.E. Charleston, WV 25304 (304) 926-0450 fax: (304) 926-0452

Austin Caperton, Cabinet Secretary www.dep.wv.gov

February 9, 2018 PERMIT MODIFICATION APPROVAL Horizontal 6A / New Drill

SWN PRODUCTION COMPANY, LLC POST OFFICE BOX 12359

SPRING, TX 773914954

Re:

Permit Modification Approval for COLUMBIA GAS TRANSMISSI

47-051-01942-00-00

Modified Cement on 9 5/8" to Type H with Bonding Agent

SWN PRODUCTION COMPANY, LLC

The Office of Oil and Gas has reviewed the attached permit modification for the above referenced permit. The attached modification has been approved and well work may begin. Please be reminded that the oil and gas inspector is to be notified twenty-four (24) hours before permitted well work is commenced.

If there are any questions, please feel free to contact me at (304) 926-0450.

James A. Martin

Chie

Operator's Well Number: COLUMBIA GAS TRANSMISSION UD MSH 9H

Farm Name: COLUMBIA GAS TRANSMISSION, LLC

U.S. WELL NUMBER: 47-051-01942-00-00

Horizontal 6A / New Drill

Date Issued: February 9, 2018

Promoting a healthy environment.

WW-68 (10/14)

API NO. 47-61	•	΄ ι	U
OPERATOR WELL NO. Columbia Cara (Investigation Lagge	4	H	E
Mall Pad Nama Columbia Gas Transmission PAD			

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION

WV Department of Environmental Protection

Page 1 of 3

WW-6B (10/14)

API NO. 47-51 OPERATOR WELL NO. Countries Gas Transmission UF A H
Well Pad Name: Columbia Gas Transmission PAD

18)

CASING AND TUBING PROGRAM

TYPE	Size (in)	New or Used	Grade	Weight per ft. (lb/ft)	FOOTAGE: For Drilling (ft)	INTERVALS: Left in Well (ft)	CEMENT: Fill-up (Cu. Ft.)/CTS
Conductor	20"	New	H-40	94#	100'	100'	CTS
Fresh Water	13 3/8"	New	H-40	48#	340'	340'	340 sx/CTS
Coal	9 5/8"	New	J-55	36#	2015'	2015'	786 sx/CTS
Intermediate	7"	New	J-55	20#	If Needed	If Needed	If Needed/As Needed
Production	5 1/2"	New	HCP-110	20#	13004'	13004'	Lead 7660x to 1857x 4/100' balds keeping
Tubing	2 3/8'	New	HCP-110	4.7#	Approx. 6382'	Approx. 6382'	4.8
Liners						1,1	

DZ/7/18

ТҮРЕ	Size (in)	<u>Wellbore</u> <u>Diameter (in)</u>	Wall Thickness (in)	Burst Pressure (psi)	Max. Associated Surface Pressure (psi)	Cement Type	Cement Yield (cu. ft./k)
Conductor	20"	30"	0.25	2120	81	Class A	1.19/50% Excess
Fresh Water	13 3/8"	17.5"	0.380	2740	633	Class A	1.19/50% Excess
Coal	9 5/8"	12 1/4"	0.395	3950	1768	Class H	1.08/50% Excess
Intermediate	7"	8 3/4"	0.317	4360	3250	Class A	1.20/15% Excess
Production	5 1/2"	8 3/4"	0.361	12360	9500	Class A	1.20/15% Excess
Tubing	2 3/8"	4.778"	0.190				
Liners			***************************************				

PACKERS

Kind:	10K Arrowset AS1-X	·	
Sizes:	5 1/2"		
Depths Set:			RECEIVED e of Oil and Gas

FEB 09 2018

WV Department of Environmental Protection Page 2 of 3 WW-6B (10/14)

API NO. 47- 51

OPERATOR WELL NO. CHAPTER CONTINUES OF H

Well Pad Name: Columbia Gas Transmission PAD

De/1/18

19) Describe proposed well work, including the drilling and plugging back of any pilot hole:

Drill and stimulate any potential zones between and including the Benson to Burket Shale. **If we should encounter a void place basket above and below void area- balance cement to bottom of void and grout from basket to surface. Run casing not less than 20' below void nor more than 50' below void. (*If freshwater is encountered deeper than anticipated it must be protected, set casing 50' below and cts.)

20) Describe fracturing/stimulating methods in detail, including anticipated max pressure and max rate:

Well will be perforated within the target formation and stimulated with a slurry of water, sand, and chemical additives at a high rate. This will be performed in stages with the plug and perf method along the wellbore until the entire lateral has been stimulated within the target formation. All stage plugs are then drilled out and the well is flowed back to surface. The well is produced through surface facilities consisting of high pressure production unites, vertical separation units, water and oil storage tanks. Max press and anticipated max rate- 9000 lbs @ 80 barrels a minute.

- 21) Total Area to be disturbed, including roads, stockpile area, pits, etc., (acres): 1.4

 22) Area to be disturbed for well pad only, less access road (acres): 1.8

 23) Describe centralizer placement for each casing string:

 All casing strings will be ran with a centralizer at a minimum of 1 per every 3 joints of casing.
- 24) Describe all cement additives associated with each cement type:

See Attachment ***

25) Proposed borehole conditioning procedures:

All boreholes will be conditioned with circulation and rotation for a minimum of one bottoms up and continuing until operator is satisfied with borehole conditions.

RECEIVED
Office of Oil and Gas

FEB **0 9** 2018

*Note: Attach additional sheets as needed.

WV Department of Environmental Protection

Page 3 of 3

Columbia Gas Transmission UD MSH 9H

4705101942 Columbra Gestransar. 9th 2/1/18

Product Name	Product Use	Chemical Name	CAS Number
BA-10A	Bonding Agent	Polyvinyl Alcohol	Proprietary

Schlumherger Cement Additive

	The state of the s		ger Cement Additives	
ı ———	Product Name	Product Use	Chemical Name	CAS Number
Surface	S001	accelerator	calcium chloride	The second secon
Intermediate	5001	accelerator		10043-52-4
-KONSCHOOLSHIP CONTRACTOR	D080	A STREET, STRE	calcium chloride	10043-52-4
Off	D801	dispersant	sodium polynaphthalene sulfonate	9008-63-3
Kiek Off Plug	D047	retarder	aromatic polymer derivative	propriatary
× 0	Contract Con	antifoam	polypropylene glycol	25322-69-4
	D167	fluid loss	aliphatic amide polymer	propriatary
	D154	extender	non-crystalline silica	7631-86-9
	D400	gas migration	boric acid	10043-35-3
70	D046		polypropylene glycol	25322-69-4
Lea	10040	antifoam	fullers earth (attapulgite)	8031-18-3
on-	D201		chrystalline silica	14808-60-7
uct	0201	retarder	metal oxide	propriatary
Production-Lead	2202		sulphonated synthetic polymer	propriatary
O.	D202	dispersant	formaldehyde (impurity)	propriatary
			polypropylene glycol	25322-69-4
	D046	antifoam	fullers earth (attapulgite)	8031-18-3
	D167	fluid loss	aliphatic amide polymer	propriatary
<u></u>		ear :	sodium polynaphthalene sulfonate	9008-63-3
h-T	D065	dispersant	sodium sulfate	7757-82-6
Production-Tall			chrystalline silica	14808-60-7
ngo	D201	retarder	metal oxide	propriatary
<u></u>	D153	anti-settling	chrystalline silica	14808-60-7

RECEIVED Office of Oil and Gas

FEB 09 2018

WV Department of **Environmental Protection** WW-6AW (1-12)

API NO. 47-51		
OPERATOR WI		
Well Pad Name:	Columbia Ga	s Transmission PAD

STATE OF WEST VIRGINIA

DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS

VOLUNTARY STATEMENT OF NO OBJECTION

Instructions to Persons Named on Page WW-6A

The well operator named on page WW-6A is applying for a permit from the State of West Virginia to conduct oil or gas well work. Well work permits are valid for twenty-four (24) months. Please contact the listed well operator and the Office of Oil and Gas if you do not own any interest in the listed surface tract.

Comment and Waiver Provisions

Pursuant to West Virginia Code § 22-6A-11(a), all persons described in subsection (b), section ten of this article may file written comments with the secretary as to the location or construction of the applicant's proposed well work within thirty days after the application is filed with the secretary.

Pursuant to West Virginia Code § 22-6A-8(b) No permit may be issued less than thirty days after the filing date of the application for any well work except plugging or replugging; and no permit for plugging or replugging may be issued less than five days after the filing date of the application except a permit for plugging or replugging a dry hole: *Provided*. That if the applicant certifies that all persons entitled to notice of the application under the provisions of subsection (b), section ten of this article have been served in person or by certified mail, return receipt requested, with a copy of the well work application, including the erosion and sediment control plan, if required, and the well plat, and further files written statements of no objection by all such persons, the secretary may issue the well work permit at any time.

WW-6A and	NOLUNTARY STATE And that I have reled above, and that I have received copies of attachments consisting of pages one (1) the well plat, all for proposed well work on the	ad the Instruct a Notice of A rough	tions to Persons N Application, an Application	amed on Page WW-6A and the associated
State:	WV	UTM NAI	Pantina	692093.15
County:	61-Marshell		Northing:	4400580.68
District:	Liberty	Public Roa		Fish Creek Road
Quadrangle: Watershed:	Carnsron Upper Chio South	Generally	used farm name:	Columbia Gas Transmission
issued on thos	that I have no objection to the planned work of materials. the box that applies			ION BY A NATURAL PERSON
☐ SURFAC	E OWNER		Signature:	
□ SURFAC	E OWNER (Road and/or Other Disturbat	1ce)	Lunt Idsme:	
□ SURPAC	E OWNER (Impoundments/Pits)		1	ON BY A CORPORATION, ETC.
E COAL O	WNER OR LESSEE		Company:	SOL ENERGY
□ COAL O	PERATOR		By: Cise Si Its: Manuals	Cool-Gas CoorDination
□ WATER	PURVBYOR		Signature: (4)	~ 0 O
□ OPERAT	OR OF ANY NATURAL GAS STORAC	E FIELD	Date: 02/6/	

Oil and Gas Privacy Notice:

The Office of Oil and Gas processes your personal information, such as name, address and telephone number, as part of our regulatory duties. Your personal information may be disclosed to other State agencies or third parties in the normal course of business or as needed to comply with statutory or regulatory requirements, including Freedom of Information Act requests. Our office will VED appropriately secure your personal information. If you have any questions about our use or your personal information, please contact. DEP's Chief Privacy Officer at depprivacyofficer@wv.gov.

WW-6AW (1-12)

API NO. 47-51 -	
OPERATOR WELL NO.	Countie Gas Terranimos UC
Well Pad Name: Columbia G	a Transmission PAD

STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS

VOLUNTARY STATEMENT OF NO OBJECTION

Instructions to Persons Named on Page WW-6A

The well operator named on page WW-6A is applying for a permit from the State of West Virginia to conduct oil or gas well work. Well work permits are valid for twenty-four (24) months. Please contact the listed well operator and the Office of Oil and Gas if you do not own any interest in the listed surface tract.

Comment and Waiver Provisions

Pursuant to West Virginia Code § 22-6A-11(a), all persons described in subsection (b), section ten of this article may file written comments with the secretary as to the location or construction of the applicant's proposed well work within thirty days after the application is filed with the secretary.

Pursuant to West Virginia Code § 22-6A-8(b) No permit may be issued less than thirty days after the filing date of the application for any well work except plugging or replugging; and no permit for plugging or replugging may be issued less than five days after the filing date of the application except a permit for plugging or replugging a dry hole: Provided, That if the applicant certifies that all persons entitled to notice of the application under the provisions of subsection (b), section ten of this article have been served in person or by certified mail, return receipt requested, with a copy of the well work application, including the erosion and sediment control plan, if required, and the well plat, and further files written statements of no objection by all such persons, the secretary may issue the well work permit at any time.

VOLUNTARY STATEMENT OF NO OBJECTION I, James Amos, hereby state that I have read the Instructions to Persons Named on Page WW-6A and the associated provisions listed above, and that I have received copies of a Notice of Application, an Application for a Well Work Permit on Form WW-6A and attachments consisting of pages one (1) through , including the erosion and sediment control plan, if required, and the well plat, all for proposed well work on the tract of land as follows: State: w Easting: 532983.15 UTM NAD 83 County: 61-Marshall Northing: 4400580.96 District: Liberty Public Road Access: Fish Creek Road Quadrangle: Cameron Generally used farm name: Columbia Gas Transmission Watershed: Upper Ohio South I further state that I have no objection to the planned work described in these materials, and I have no objection to a permit being issued on those materials. *Please check the box that applies FOR EXECUTION BY A NATURAL PERSON ☐ SURFACE OWNER Signature: Print Name: ☐ SURFACE OWNER (Road and/or Other Disturbance) Date: ☐ SURFACE OWNER (Impoundments/Pits) FOR EXECUTION BY A CORPORATION, ETC. ☐ COAL OWNER OR LESSEE Company: Columbia Gas Transmission By: James Amos ☐ COAL OPERATOR SR ENGINEER □ WATER PURVEYOR Signature Date:

Oil and Gas Privacy Notice:

☑ OPERATOR OF ANY NATURAL GAS STORAGE FIELD

The Office of Oil and Gas processes your personal information, such as name, address and telephone number, as part of our regulatory dutics. Your personal information may be disclosed to other State agencies or third parties in the normal course of business or as needed to comply with statutory or regulatory requirements, including Freedom of Information Act requests. Our office will appropriately secure your personal information. If you have any questions about our use or your personal information, please contact. DEP's Chief Privacy Officer at depprivacyofficer@wy.gov. Office of Oil and Gas

Central-East Geomarket Cement Lab Report

L. P	10	L
	8	

ent/Well Information:				
Operator:	BHST:	85°F	Client Contact:	
Well Name:	BHCT:	80°F	BHI Representative:	
API #:	MD:	2,387 FT	Slurry Description:	
County:	TVD:	2,387 FT	Slurry Type:	
State:	Casing Size:	9-5/8"	Test Number:	1709181-1
Job Type:	Hole Size:	12-3/8"	Test Date:	9/20/2017
District:	Water Type:	Field Water	Notes	

rgo Class II + 10/h	A 7D : O 40/						
arge Class H + 1%bw	OC A-7P + 0.4%	DWOC BA-10A					
Base Material	Conc.	Additive	Conc.	UoM	Additive	Conc.	UoM
Dasc Material							

Density	16.4	ppg	Yield	1.08	ft³/sk	Mix Water	4.35	gal/sk	Mix Water	38.6%
---------	------	-----	-------	------	--------	-----------	------	--------	-----------	-------

Rheology	300	200	100	60	30	6	3		
Ambient	160	126	85	68	52	33	25	1	
80°F	210	167	121	100	82	52	37	Conditioning Time:	65 Minutes

	Free Fluid	0	%	Channeling	No	Settling	No
ſ	Fluid Loss	7	cc/30min				

	TO THE PERSON NAMED IN COLUMN 1					The state of
Thickeni	ng Time F		100 lb/100 f			
50 Bc	2:24	70 Bc	3:03	100 Bc	3:30	0:13
				ACCUPATION AND ADDRESS OF THE PARTY.		

API Static Gel St	rength:			
100 lb/100 ft ²	500 lb/100 ft ²	Transition Time	Condition Time	
0:13	0:26	11 Minutes	75 Minutes	

Compre	ssive Strer	gth Result	s:							
Temp	1,284 psi	2,204 psi				50psi	350psi	500psi	3000psi	Algorithm
85°F	8:00	12:00	24:00	48:00	72:00	3:29	4:28	4:59	16:26	С


Compre	essive Stre	ngth Result	s:	100		74.55			7 5 6 10	
Temp	1,695 psi	2,726 psi		12		50psi	350psi	500psi	3000psi	Algorithm
90°F	8:00	12:00	24:00	48:00	72:00	1:42	3:07	3:34	13:19	С


Comments:				

The above data are supplied solely for informational purposes, and Baker Hughes Inc. makes no guarantees or warranties, either expressed or implied, with respect to the accuracy or use of these data and interpretations. All products, warranties, and guarantees shall be governed by the standard contract terms at the time of the sale.


RECEIVED Office of Oil and Gas




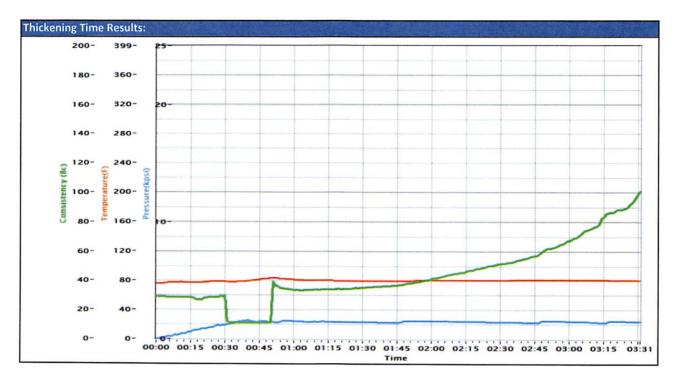

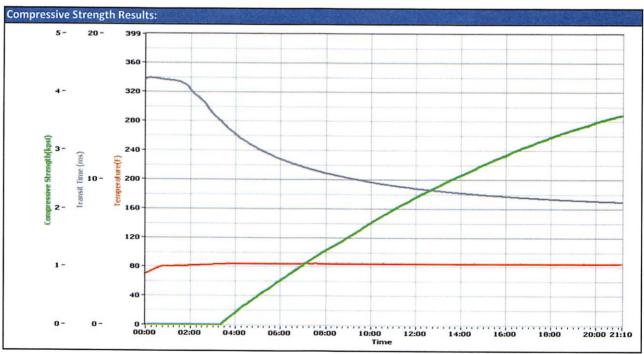

RECEIVED Office of Oil and Gas

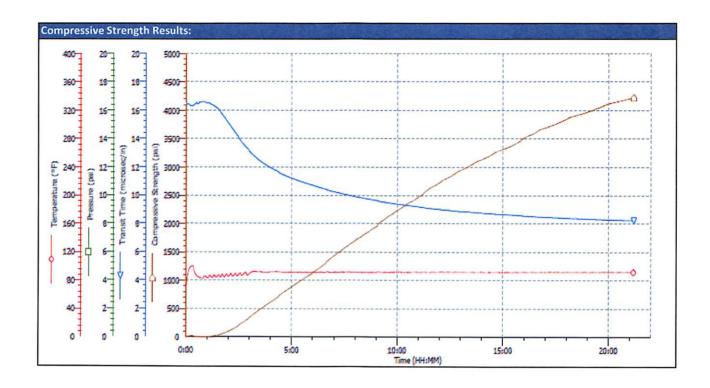

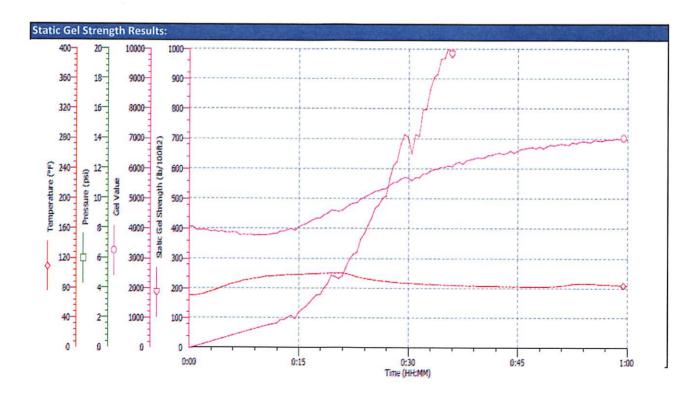

RECEIVED
Office of Oil and Gas

FEB 09 2018

WV Department of Environmental Protection



Central-East Geomarket Cement Lab Report

lient/Well Information:				
Operator:	BHST:	90°F	Client Contact:	
Well Name:	внст:	80°F	BHI Representative:	Andrew Morris
API #:	MD:	1,995 ft	Slurry Description:	Single
County:	TVD:	1,995 ft	Slurry Type:	Field-Short
State:	Casing Size:	9.625"	Test Number:	82273-001
Job Type:	Hole Size:	13.375"	Test Date:	5/4/2017
District:	Water:	Rig	Notes	

MARKANAN NI SERSESIA			Slurry Design:										
Class A + 0.5% A-7P + 0.4% BA-10A													
Vendor	Conc.	Additive	Conc.	UoM	Additive	Conc.	UoM						
Joppa	100%	A-7P	0.5	%BWOB	BA-10A	0.4	%BWOB						
	Vendor	Vendor Conc.	Vendor Conc. Additive	Vendor Conc. Additive Conc.	Vendor Conc. Additive Conc. UoM	Vendor Conc. Additive Conc. UoM Additive	Vendor Conc. Additive Conc. UoM Additive Conc.						

Slurry Proper	ties:									1000
Density	15.6	ppg	Yield	1.19	ft³/sk	Mix Water	5.21	gal/sk	Mix Water	58.810%

Rheology	300	200	100	60	30	6	3
Ambient	97	77	55	45	36	25	22
80°F	118	96	69	58	48	36	29

Free Fluid	0.5	mL @ 90°	Channeling	No	Settling	No
Fluid Loss	20	cc/30min				

min	100 lbs/sec^2: 0:21
11111	200 lbs/sec^2: 0:30
	300 lbs/sec^2: 0:35
10 min	400 lbs/sec^2: 0:39
31 lb/100 ft ²	500 lbs/sec^2: 0:42
	Zero Gel Time: 0:21

SGSA:

TT: 0.:21

Thicken	ing Time	Results:			
50 Bc	4:37	70 Bc	4:38	100 Bc	4:38

Preconditioned for 80 minutes prior to UCA testing.

10 sec

29 lb/100 ft²

Gel

Strength

Comments:

Compressive Strength Results:									
Temp	50 psi	350 psi	500psi	1200psi	1004psi	1615psi	Alg.		
90°F	2:25	4:21	5:13	9:18	8:00	12:00	В		

Temp	50 psi	350 psi	500psi	1200psi	1004psi	1615psi	Alg.		
90°F	2:25	4:21	5:13	9:18	8:00	12:00	В		

The above data are supplied solely for informational purposes, and BJ Services makes no guarantees or warranties, either expressed or implied, with respect to the accuracy or use of these data and interpretations. All products, warranties, and guarantees shall be governed by the standard contract terms at the time of the sale.

> RECEIVED Office of Oil and Gas


Instrument: 3 7222-386 7222-386

Test Start Time and Date: 9:14:03 AM5/2/2017

Test Length:4:38:45





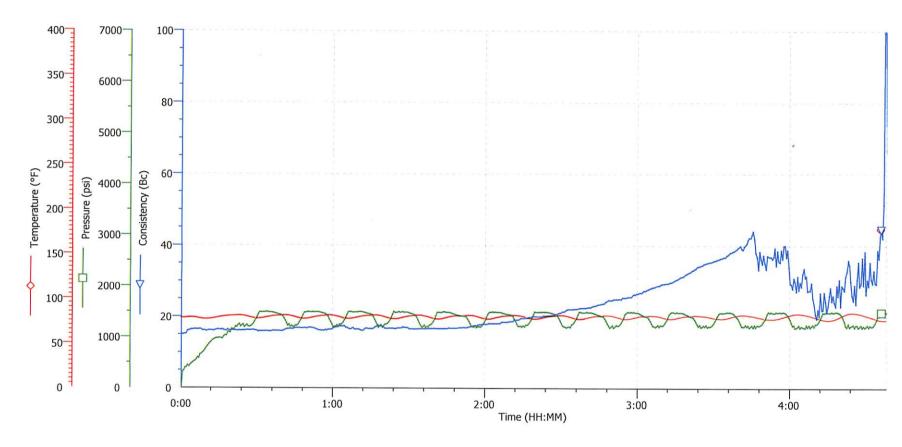



BJ Services District Lab

BJ Services District Lab

Clarksburg, WV

This Outer for informational purposes, and BJ Services Co makes no guarantees or warranties, either expressed or implied, as to the accuracy or use of these data and interpretations.








Instrument: SGSA 1 1137 Algorithm: Compressive strength type B (more than 14 lb/gal) Comments: Tap Water Test Start: 5/3/2017 11:31:53 AM Algorithm: Static gel strength

Test Stop: 5/4/2017 7:53:53 AM

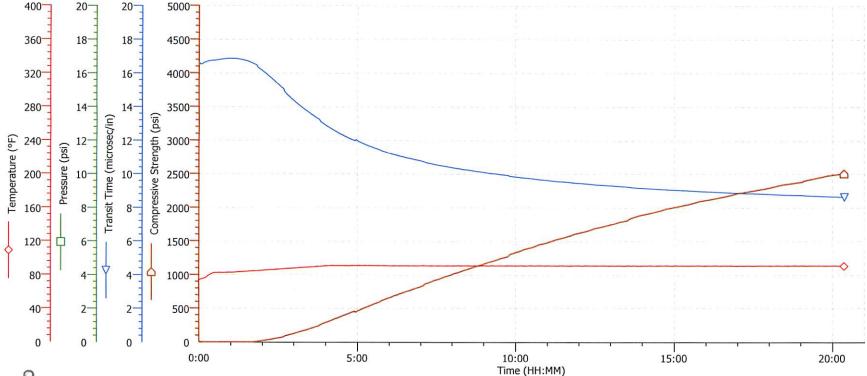

Office of Gas

WV Department of Environmental Protection

Printed: 5/4/2017 8:21:27 AM

Page 1




Instrument: SGSA 1 1137 Algorithm: Compressive strength type B (more than 14 lb/gal)

Comments: Tap Water

Test Start: 5/3/2017 11:31:53 AM Algorithm: Static gel strength

Test Stop: 5/4/2017 7:53:53 AM

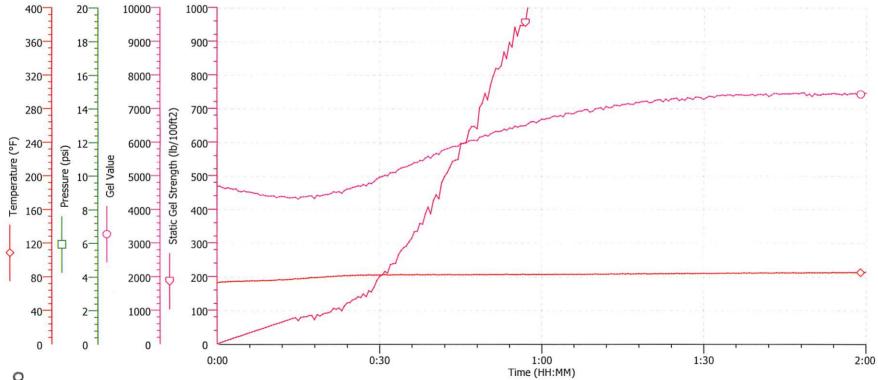



Printed: 1/24/2018 10:56:09 AM

Page 1